HANDURO THAILAND

HD-156NTTC-30-750W

750W

TOPCon BIFACIAL

High efficiency bifacial modules



Voc 57.67V	Vmp 48.25V	N-Type Topcon 156 CELL
Isc 16.42A	Imp 15.54A	Power Distnbution 0~+5

CERTIFICATE

IEC 61215
IEC 61730

Green Industry กระทรวงอุตสาหกรรม


CERTIFICATION BODIES ISO 9001:2015

ISO 14001

Module effiency 23.4% TIER 1

WARRANTY Quality Guarantee 12 years Power Warranty 30 years

MODULE DIMENSIONS(MM)

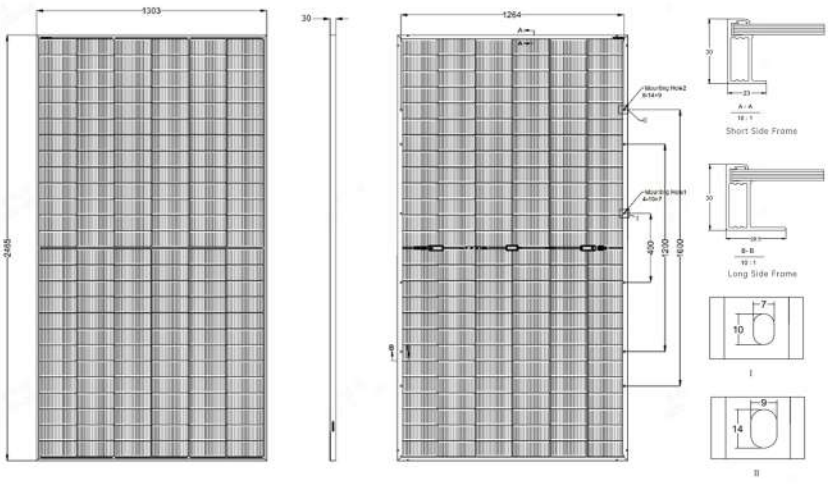

STRUCTURAL CHARACTERISTICS

Cell Type	N-Type TOPCon
No. of cells	156 (2×78)
Output Cables	TüV 1×4mm ²
	(+)350mm,(-)280mm in length or customized length
Glass	Front: 2.0mm, AR-coating, semi-tempered
	Rear: 2.0mm, semi-tempered
Frame	Anodized aluminum alloy frame
Weight	38.7 kg (85.32 lbs)
Dimension	2465×1303×30mm
Packaging	33 pcs per pallet
	132 pcs per 20' HC, 264 pcs per 40' HC
Protection Class	Class II
Fire Rating	IEC Class A

Handuro (Thailand) Company Limited

Add.: 277/1 Moo 2, Ban Yang, Mueang Buriram, Buriram, Thailand
Tel.(+66) 092-5898889 E-mail: handurothailand@gmail.com Website: www.handurothailand.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail