



HD-156NTTC-30-750W

750W

TOPCon BIFACIAL

High efficiency bifacial modules



Voc
57.67V

Vmp
48.25V

N-Type Topcon
156 CELL

Isc
16.42A

Imp
15.54A

Power Tolerance
0~+5

CERTIFICATE



Green Industry
กรมส่งเสริมการค้าระหว่างประเทศ



Module efficiency

23.4%

WARRANTY


Quality
Guarantee

12
years

Power
Warranty

30
years

MODULE DIMENSIONS(MM)

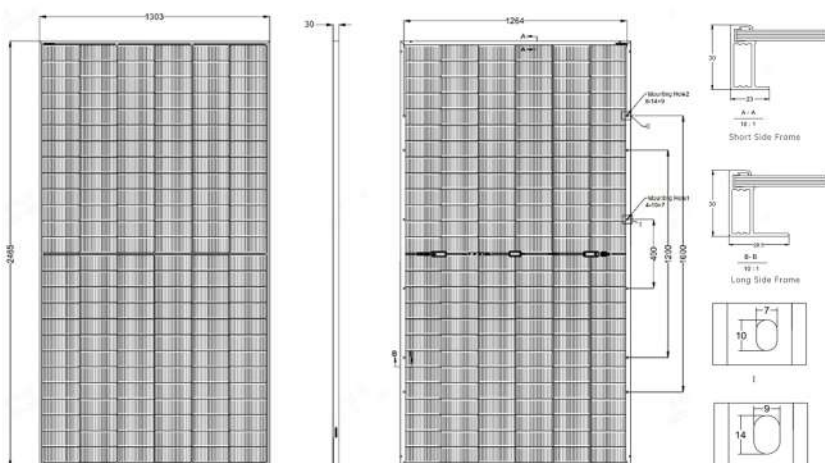

STRUCTURAL CHARACTERISTICS

Cell Type	N-Type TOPCon
No. of cells	156 (2x78)
Output Cables	TÜV 1x4mm ² (+)350mm, (-)280mm in length or customized length
Glass	Front: 2.0mm, AR-coating, semi-tempered Rear: 2.0mm, semi-tempered
Frame	Anodized aluminum alloy frame
Weight	38.7 kg (85.32 lbs)
Dimension	2465x1303x30mm
Packaging	33 pcs per pallet 132 pcs per 20' HC, 264 pcs per 40' HC
Protection Class	Class II
Fire Rating	IEC Class A



Handuro (Thailand) Company Limited

Add.: 277/1 Moo 2, Ban Yang, Mueang Buriram, Buriram 31000

Tel. (+66) 092-5898889 E-mail: handurothailand@gmail.com Website: www.handurothailand.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail