



HD-144NTTC-30-600W

600W

182 TOPCon BIFACIAL

High efficiency bifacial modules



Voc
53.40V

Vmp
45.95V

N-Type Topcon
144 CELL

Isc
13.77A

Imp
13.06A

Power Tolerance
0~+5

Module efficiency

23.22%

WARRANTY

Quality
Guarantee

15
years


Power
Warranty

30
years

CERTIFICATE



MODULE DIMENSIONS(MM)

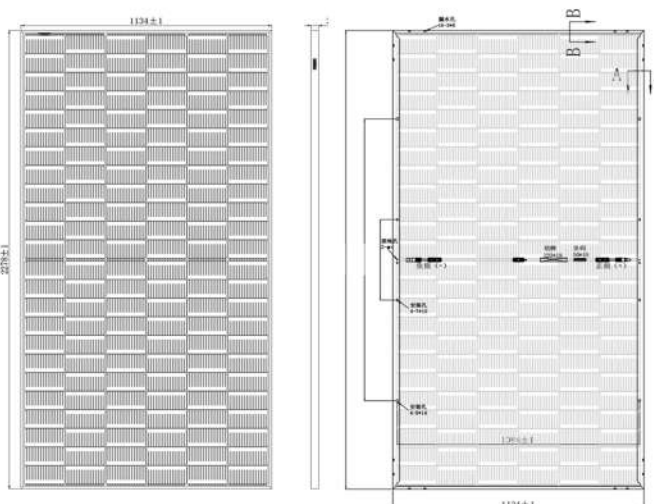

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2278x1134x30mm
Weight	31kg
Cell	144 cells, N type Mono-Crystalline , 182mm×91mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm ²
Wire length	Line length 350mm/customized
Connector	MC4 Compatible
Packing Specification	37 pcs/Pallet ; 740 pcs/40' HQ



Handuro (Thailand) Company Limited

Add.: 277/1 Moo 2, Ban Yang, Mueang Buriram, Buriram 31000

Tel. (+66) 092-5898889 E-mail: handurothailand@gmail.com Website: www.handurothailand.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail