HANDURO®
THAILAND

HD-144NTTC-30-600W

600W

182 TOPCon BIFACIAL

High efficiency bifacial modules

มอก.61730 เล่ม 2-2567

บริษัท แฮนดูโร่ (ไทยแลนด์) จำกัด



Voc 53.40V	Vmp 45.95V	N-Type Topcon 144 CELL
Isc 13.77A	Imp 13.06A	Power Distnbution 0~+5

Module effiency **TIER 1**

23.22%

WARRANTY Quality Guarantee **15** years Power Warranty **30** years

CERTIFICATE

Green Industry กระทรวงอุตสาหกรรม

ISO


ACS REGISTRARS CERTIFICATION BODIES ISO 9001:2015

CERTIFIED ISO 14001

IEC

IEC 61215
IEC 61730

MODULE DIMENSIONS(MM)

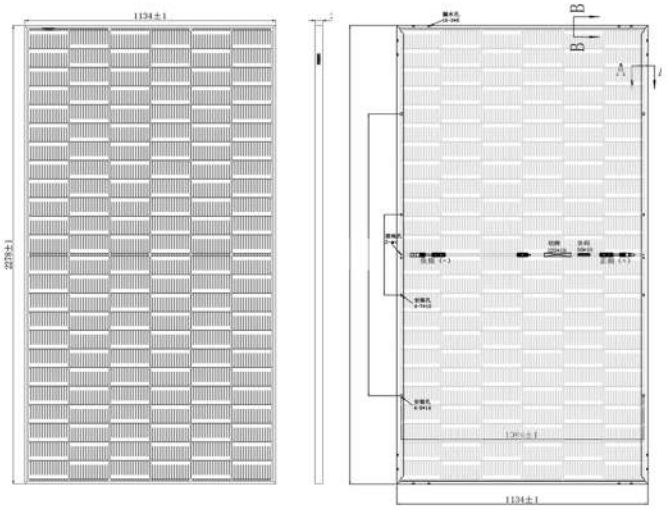

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2278x1134x30mm
Weight	31kg
Cell	144 cells,N type Mono-Crystalline , 182mm×91mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm²
Wire length	Line length 350mm/customized
Connector	MC4 Compatible
Packing Specification	37 pcs/Pallet ; 740 pcs/40' HQ

Handuro (Thailand) Company Limited

Add.: 277/1 Moo 2, Ban Yang, Mueang Buriram, Buriram, Thailand 31000

Tel.(+66) 092-5898889 E-mail: handurothailand@gmail.com Website: www.handurothailand.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail