YHSUNPRO POWER

HANDURO THAILAND

SPDG650-N156M10

650W

TOPCon BIFACIAL

High efficiency bifacial modules



Voc 56.43V	Vmp 46.33V	N-Type Topcon 182 CELL
Isc 14.66A	Imp 14.03A	Power Tolerance 0~+5

CERTIFICATE


CE · CLEAN ENERGY COUNCIL MEMBER · TÜV SÜD · CQC · MCS CERTIFIED · Green Industry กระทรวงอุตสาหกรรม · ISO · ACS REGISTRARS CERTIFICATION BODIES ISO 9001:2015 · CERTIFIED QA INTERNATIONAL ISO 14001

Module effiency

23.25% **TIER 1**

WARRANTY Quality Guarantee **15 years** Power Warranty **30 years**

MODULE DIMENSIONS(MM)

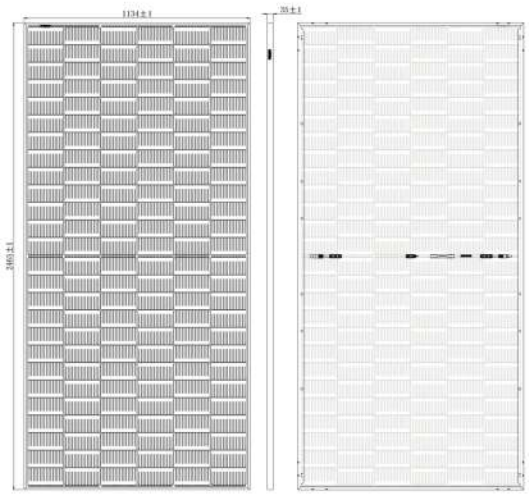

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	2465x1134x35mm
Weight	33.6kg
Cell	156 cells,N type Mono-Crystalline , 182mm×91mm
Front glass	2.0mm , Anti-Reflection Coating
Back glass	2.0mm , Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68 , 3 bypass diodes
Output wire	4mm²
Wire length	Line length 1400mm/customized
Connector	MC4 Compatible
Packing Specification	31 pcs/Pallet ; 496 pcs/40' HQ

LINE

Handuro (Thailand) Company Limited

Add.: 277/1 Moo 2, Ban Yang, Mueang Buriram, Buriram 31000

Tel.(+66) 092-5898889 E-mail: handurothailand@gmail.com Website: www.handurothailand.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail